


Technical drawing of the HS810 sink showing dimensions and mounting details. The drawing includes the following dimensions and features:

- Overall Dimensions:**
  - Length: 820
  - Width: 565
- Mounting Dimensions:**
  - Top mounting holes: 80, 215, 220, 215, 80
  - Bottom mounting holes: 80, 215, 220, 215, 80
  - Side mounting holes: 80, 197.5, 197.5, 80
- Sink Dimensions:**
  - Length: 810 (sink length)
  - Width: 527<sup>+2</sup><sub>-0</sub> (cut out width)
  - Depth: 555 (sink width)
- Other Features:**
  - Reinforcing plywood (t15)
  - Three cutouts (W25xH15)
  - Counter corner radius R
  - 4-R26

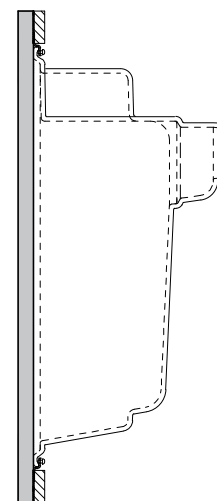

Package			
No.	Product name	Product code	Quantity
1	Sink	HS810	1
2	Drain cover	HF106x166	1
3	Mounting bracket	SUZ	8
4	Pan head screw	M4x6	8
5	Mounting bracket	SU-21	6
6	Truss head tapping screw	M4x18	6
7	Flat washer	M4	6
8	Skimless drainage set	-	1
9	Basket	-	1

▲ Notices

1. ★★★ It is applicable with counter thickness of more than 12mm.
2. Install the reinforcing plywood layer on the back and adhere it to the counter using epoxy adhesive.
3. Secure the sink and the plywood layer using 14 mounting brackets. Please note that there are two types of brackets are being used.
4. Apply modified silicone to the joint between the sink and the counter for waterproofing.
5. Adjust the dimensions of the plywood layer based on the sink's load bearing level, the counter dimensions and the cabinet dimensions.

Technical drawing of the mounting bracket assembly, showing a side view and a cross-section view.

**Side View Dimensions and Labels:**

- Top dimension:  $782 \pm 0.2$  (cut out length)
- Dimension below cut out length: 780
- Note: ※1mm sink rim reveal installation
- Left side dimension: 20
- Right side dimension: 15, 20, 35
- Bottom dimension: 820
- Labels: Modified silicone, Epoxy adhesive, Reinforcing plywood (t15), Mounting bracket (SU-21), M4 Flat washer Unichrome, M4x18 Truss head tapping screw Unichrome


**Cross-section View Dimensions and Labels:**

- Top dimension: 1
- Dimension below cut out length: 780
- Note: ※1mm sink rim reveal installation
- Left side dimension: 20
- Right side dimension: 15, 20, 35
- Bottom dimension: 820
- Labels: Modified silicone, Epoxy adhesive, Reinforcing plywood (t15), Mounting bracket (SU-21), M4 Flat washer Unichrome, M4x18 Truss head tapping screw Unichrome

Technical drawing illustrating the sink rim reveal installation, showing cross-sections and dimensions.

**Dimensions and Labels:**

- Overall Width:** 527  $\pm 2$  (cut out width)
- Installation Type:** ※1mm sink rim reveal installation
- Left Side Components:**
  - Epoxy adhesive
  - Modified silicone
  - Reinforcing plywood (t15)
  - Cut out (plywood) H=2mm
  - Mounting bracket (SUZ t1.6)
  - M4x6 Pan head screw Unichrome
- Right Side Components:**
  - Faucet hole position
  - Modified silicone
  - Epoxy adhesive
  - Reinforcing plywood (t15)
  - Cut out (plywood) H=2mm
  - Mounting bracket (SUZ t1.6)
  - M4x6 Pan head screw Unichrome
- Other Dimensions:**
  - 20 (height of left side assembly)
  - 15 (height of right side assembly)
  - 35 (total height of right side assembly)
  - 7 (height of mounting bracket)
  - 5 (height of cut out)
  - 565 (total width of base)
  - Φ 38 (faucet hole diameter)

Title	Under mounting		
Product Name	HS810		
	Scale	1/2.5	1/10
	Draw No.  GP-240402		